LightFORCE
PERFORMANCE LIGHTING
OUR MOST POPULAR LIGHT
JUST GOT EVEN BETTER
170 STRIKER
NEW
& IMPROVED
Jeep
LIGHTFORCE
AUSTRALIAN MADE
FORGED IN THE OUTBACK
The mid-size 170 STRIKER™ outperforms many larger lights and is one of our most popular models worldwide. It's compact size makes it an easy install on most vehicles and with a set of COMBO or SPREAD filters it is incredibly versatile creating an ideal peripheral light pattern.
LightFORCE PERFORMANCE LIGHTING CUSTOM BUILT
lightforce.com
Lightforce Custom Built offers a custom design and fabrication service, specialising in lighting solutions for customers with unique requirements. Feel free to contact us to discuss your individual needs.

TECHNICAL SPECIFICATIONS

LIGHTFORCE 170 STRIKER

The mid-size 170 STRIKER™ outperforms many larger lights and is one of our most popular models worldwide.

FEATURES:

- Compact performance but with optimum reflector size outperforming larger rivals
- 12V 100 watt Xenophot® 2000 hour bulb (24V halogen version available)
- Lightweight polycarbonate, glass filled nylon composite construction
- Gore® protective vent (IP57/67/68/IP69K) to protect against moisture / contaminant ingress
- Light output can be tailored from a WIDE, COMBO or long distance SPOT pattern
- Ideal additional light partnered with 240 BLITZ / XGT / HID for off-road motorsport
- CLEAR SPOT clip-on polycarbonate filter supplied | Others available
- Compatible with the Lightforce modular filter system
- 3 Year warranty

HID:

- Characteristic blue billet aluminium hard anodised bulb holder.
- 35W / 50W external ballasts | encapsulated for durability
- Long leads | Mount the ballast under the hood
- Multi-volt |12V or 24V DC versions are available
- 5000°K super white | Closer to daylight, white brighter
- Long life 3000 hour bulb
- Reverse polarity circuit protection

DIMENSIONS:

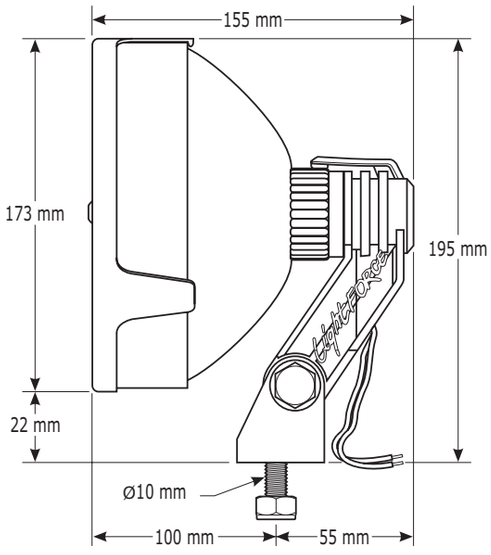

SPECIFICATIONS:

- Current draw: (100W) 8.33 Amps | (35W) 2.92 Amps | (50W) 4.16 Amps
- Light output (100W) 382 600 candela | 875m @ 1 Lux
  (35W) 456 000 candela | 955m @ 1 Lux
  (50W) 920 500 candela | 1357m @ 1 Lux
- Operating temperature -40°C to 63°C (-40°F to 145°F)
- Weight including bracket (single unit) 560g - 1lb 3.75oz

OPTIONAL ACCESSORIES

- Driving light base - high mount (MV)
- Driving light base - low mount (MVDL)
- O-Ring seal reflector to arm suit SL and RM (ORSM)
- 170mm replacement reflector (REFH170)



National Association of Testing Authorities Accredited, Australia 2014.
Photometric testing performed by Photometric Solutions International Pty Ltd (PSI) Huntingdale VIC • 2014

LightFORCE™ PERFORMANCE LIGHTING